




world leader in  
multifunctional  
floor tiles

HOME/DIY

# BERGO TILES

## Multifunctional floors

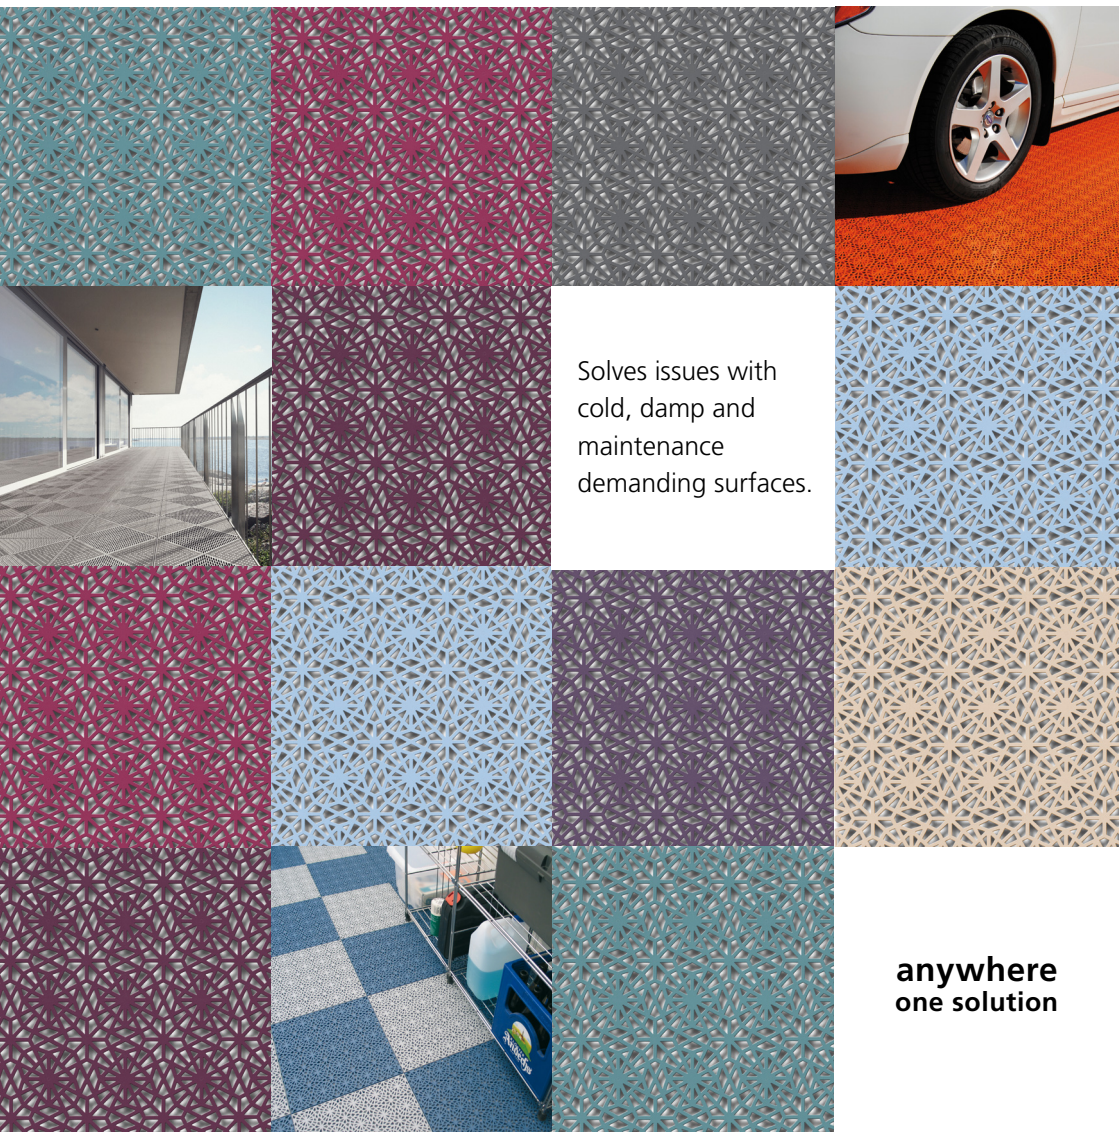

**anywhere  
one solution**



# BERGO TILES

are multifunctional

- UV-stabile - for inside and outside.
- Easy to install, easy to move. Requires no fasteners.
- Ventilating, draining and slip resistant.
- Hot/cold reducing, ergonomic and sound absorbing.
- Minimal maintenance. Easy to clean. Long-lasting.
- Environmentally friendly, 100% recyclable materials.








**Damp in the basement?**  
 Avoid damp / mould. Bergo tiles leave an air gap that ventilates the damp concrete floor.

**Bergo tiles are non-toxic.**  
 Avoid splinters from toxic, pressure treated decking.

**Draining.**  
 Dries quickly after rain.

**Maintenance-free.**  
 No oiling, no grinding.

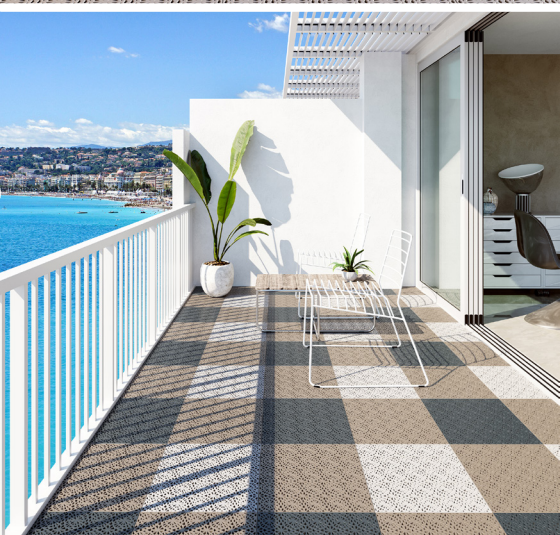

# Bergo Flooring provides a reliable and cost-effective solution

The multifunctionality in a Bergo floor allows the surface underneath to “breathe”, which prevents moisture being trapped and odours forming. You can easily perform the installation yourself.

## THIS IS BERGO FLOORING


Since 1972, Bergo Flooring has been developing multifunctional composite flooring, well-tested to withstand extremely harsh environments. The products are generally functionally adapted to withstand any climate and have the following multifunctions: Draining, Ventilating, Sound-absorbing, Thermal-separating, Non-slip, Ergonomic, Material is non-organic = does not absorb liquid and is chemical resistant and FDA-approved material.

This makes the flooring perfect for tough environments.

For traditional uses in private cellars and storage environments, we recommend System 2-floors, which is regarded as all-round products. For industrial and public environments, which often require something slighter tougher, we recommend Bergo Supreme.

## BERGO'S ENVIRONMENTAL COMMITMENT


All our products are made here in Sweden in our own eco-friendly production facilities, without environmentally harmful emissions. The products are made of 100% recyclable PP composites, which can be reused over and over again. Without compromising on function and quality, Bergo has recently launched its Eco series, produced in 100% recycled material, ensuring each installation contributes to a massive reduction in waste!

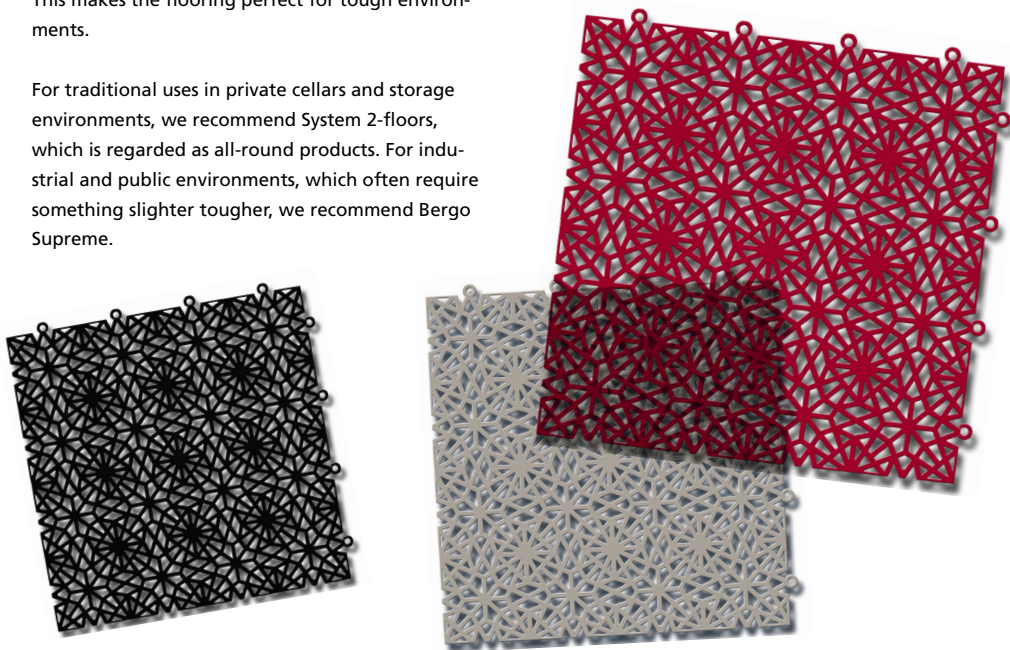

## THIS IS A FLOOR FROM BERGO FLOORING

Bergo Flooring is a floating floor that can be laid on most surfaces without screws, nails or glue. Thanks to the open structure of the flooring, the surface underneath can breathe. Bergo Flooring is available in several different designs and colours. Accessories such as edge strips, corner strips, expansion strips (System 1) and removal tools are available.



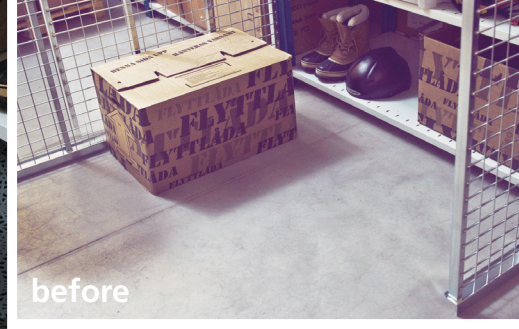

before



before



## REMODELLING

Remodelling, for example when industrial premises are to be used for another purpose, often involves worn, repaired and stained floors that are difficult to fix. You can transform them within a few hours into a brand new environment with real impact with the help of Bergo flooring.


## GROUND MOISTURE

Concrete floors consisting of concrete slabs placed on the ground are often affected by moisture from the ground underneath. This has nothing to do with how good the drainage around the house is, but is a normal migration of moisture from below, leading to a gradual moistening of the concrete floor. If organic material is placed directly on the concrete floor, there is a considerable risk that the material will become damaged and that mould will eventually form.

Bergo flooring is non-organic and its construction leaves an air gap under the floor which eliminates the risk of moisture or anything else under the surface migrating into what is placed on it.

## CONSTRUCTION MOISTURE

A freshly cast concrete floor always contains an excess of moisture, which must dry out before anything organic can be placed on it. The drying time is often several months, which prevents you from using the space. Bergo flooring cuts this waiting period, as its construction places a non-organic distance between the floor and any storage, allowing the surface underneath to "breathe."

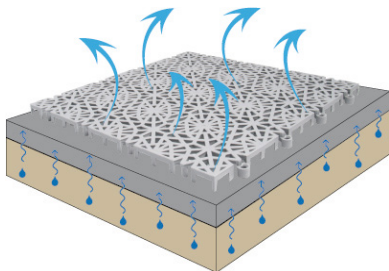

## MOISTURE DAMAGE

A traditional floor needs to dry out after moisture damage before it can be used again. This often causes months of problems associated with inconvenience and high costs. Bergo flooring, thanks to its design, allows the floor to "breathe", reducing time to use, inconvenience, and, not least, the cost to residents.

## BASE SURFACE

Bergo flooring is easy to lay and can be placed on an existing floor without fasteners such as glue, screws or nails. It has a low construction height, only around 10 mm. The floor is made of FDA-approved material that does not give off any emissions, which means that it meets environmental and health criteria. As the floor is chemical resistant, it retains its function even in aggressive environments. The design with the built-in air gap allows the surface underneath to "breathe", which in turn causes the entire surface to dry up, in turn eliminating any unpleasant odours. The flooring's natural air gap insulates the surface underneath so the floor is more comfortable to walk on. This design, which is also profiling, provides a safe, cost-effective and practical solution.

### WHAT TO DO:

1. Remove the old flooring, if necessary.
2. Vacuum the surface and remove any organic material prior to installing Bergo flooring.
3. It's a good idea to place a fibre cloth, such as a ground cloth, between the Bergo flooring and the surface underneath to achieve a sound-proofing effect.
4. Start in a corner and remember to always turn the eyes in the same direction.
5. Fix the tiles with the protruding rings over the eyes and fit them together with sharp blows using a rubber mallet.
6. Always install Bergo flooring at least 10 mm from the wall, door thresholds, etc.
7. See detailed laying instructions on [www.bergoflooring.se](http://www.bergoflooring.se).







# Test results from SP (Technical Research Institute of Sweden)

Older homes with unventilated cellars often have high levels of relative humidity in the concrete slabs, either through vapour diffusion or condensation on their concrete surface. This often happens in summer. These adverse conditions can cause problems with moisture and mould if material of an organic nature is stored in direct contact with the moist concrete surface.

SP's tests clearly show that a Bergo floor delays the time it takes for moisture to penetrate the material placed on a Bergo floor.



Thick corrugated cardboard storage boxes were placed directly on the concrete surface that was prepared from below with water to simulate damp ground.



Results after 21 days: Strong moisture absorption in the bottom of the box.





Thick corrugated cardboard storage boxes were placed directly on Bergo flooring with the concrete underneath prepared from below with water to simulate damp ground.



Results after 21 days: No visible moisture absorption.

Excerpts from SP's report: "In conclusion, the Bergo tile can prevent capillary transport of both penetrating moisture through a concrete slab on the ground and condensed moisture on the surface of the concrete slab into material placed on top of Bergo tiles. They also allow for ventilation due to the air gap between the Bergo tiles and the concrete slabs."




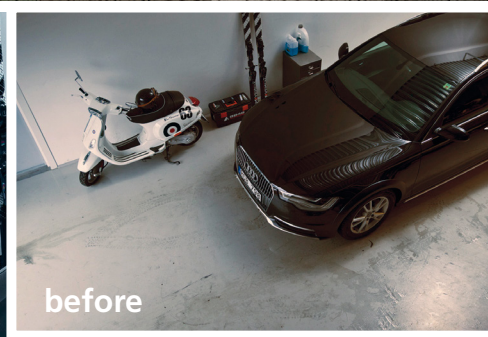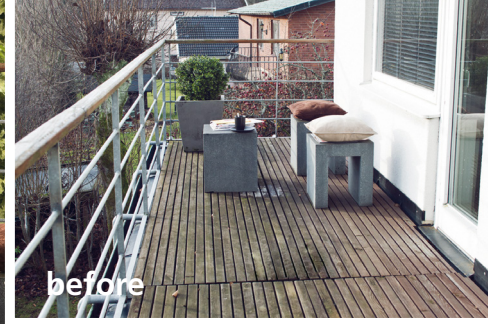



# EASY TO INSTALL

No need of glue or special tools to lay a Bergo floor. It can be installed in any imaginable type of environment and climate, and functions equally well indoors as out. The use of Bergo floor tiles solves many problems, such as installations on damp surfaces, cracked/uneven subfloors and worn-out wooden decks.




## BERGO TILES SYSTEM 2


Size: 38 x 38 cm

Packaging: 1 m<sup>2</sup> / pks = 7 tiles


BERGO XL




BERGO UNIQUE



BERGO ELITE



BERGO NOVA




## EXTREMELY DURABLE MATERIAL

All our floors are made of extremely durable, UV-stabilised PP-composite. They are also environmentally friendly and 100 % recyclable. FDA approved. No emissions. (No PVC).


## ACCESSORIES



Edge strip (37x55mm) and Corner strip (55x55mm).



Cable strip (377x55mm) and Cable Cross-piece (55x55mm, where Cable strips intersect).



Disassembly tool

Our products are available in a wide range of colours. See [www.bergoflooring.com](http://www.bergoflooring.com).



Proudly made  
in Sweden

[www.bergoflooring.com](http://www.bergoflooring.com)











WORLD LEADER IN  
MULTIFUNCTIONAL  
FLOOR TILES

[www.bergoflooring.com](http://www.bergoflooring.com)